

Intelligent LED Signalling

litt

new versions

Features

Powered by Philips Luxeon Hi-Power LEDs for excellent daylight visibility

Homogenous light radiation for 360° viewing angle

User selectable flash patterns and dim settings via supplied LightHouse® software

Wide range of light segments available in red, green, yellow, white and blue. Different sizes can be combined.

Sleek, durable all aluminium body, compatible with m!ka MSS mounting system

Easy installation with a choice of mounting adapters

Tech Specs


Universal voltage range 12-24 VDC with inverse polarity protection for convenient interfacing

Environmentally friendly low power consumption avoids thermal load; typical lifetime 100 years @ 3 hrs daily on-time

Bus control with automatic segment color detection

Flash memory in each segment to hold setup data permanently

USB interface for configuration via LightHouse® or for serial control

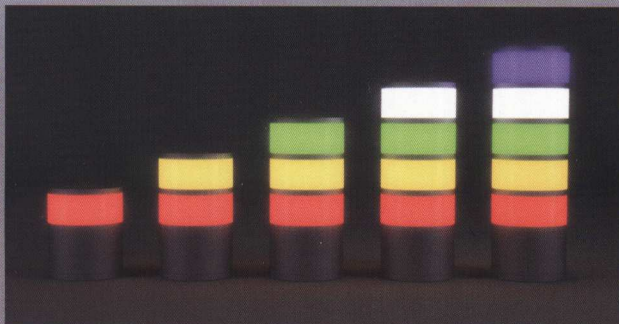

www.yellowtec.com

Designed and Made in Germany